

好搬手

#goodlifta

Smart Lifters

2025

U P L I F T E D S O U L U T I O N S

“Only great quality
can give a name its value.”

— Hans Wilsdorf, founder of Rolex

CONTENT

I	Mission & Vision	p.1
II	Objectives	p.3
III	Features	p.4
IV	S - Stainless Steel Series	p.9
V	Self-propelled Series	p.19
VI	A - Aluminium Mast	p.27
VII	Popular Manual lifting tools	p.35
VIII	Popular Electric lifting tools	p.37
IX	Control systems	p.39
X	Showcase	p.41

Creating a New Landscape: Staying True to Our Founding Mission

Starting a business is never easy.
Our journey began with two passionate partners
pursuing a shared dream—offering distinctive,
high-quality products and services.

Work smarter with #goodlifta

Inspired by real-life challenges, we developed #goodlifta: an electric lifter designed to reduce injuries from heavy lifting and make jobs safer and more efficient.

#goodlifta is a lightweight, compact, and easy-to-operate electric lifter that balances design with function. It's the smart, customized, and sustainable choice for modern workplaces.



#goodlifta

Labor shortages and high turnover are challenges across industries. Rather than relying on constant rehiring, investing in technology like #goodlifta empowers teams, reduces strain, and unlocks productivity. A streamlined workforce means better outcomes, happier clients, and sustainable success.



Customization

Custom Solutions, Limitless Possibilities
Our smart lifters go beyond the limitations of forklifts and cranes. With customizable lift heights and tools, it adapts to your workflow—no matter the environment. Efficiency, safety, and precision, all in one solution.



Smart
solutions

Safe, easy to operate, reliable.



Reels - film rolls, paper reels, fabrics or textile rolls...



Containers - tanks, pots, drums, vats, barrels...



Boxes - carton, wooden box, logistics containers...



Others - paper bags, sacks, fragile items, dangerous goods...




Versatile

Need it your way? It's already on it !
Ideal for a wide range of environments:
Cleanrooms & Labs, Data Centers, Semiconductor Manufacturing, Pharmaceutical Facilities, Food & Beverage Production, Healthcare Settings, Printing & Packaging Industries, Warehousing & Logistics Centers, Libraries & Archives, Automotive Workshops & Repair Shops...

Objectives

Improve workflow with #goodlifta

Satisfy the needs of all parties and create a win-win situation

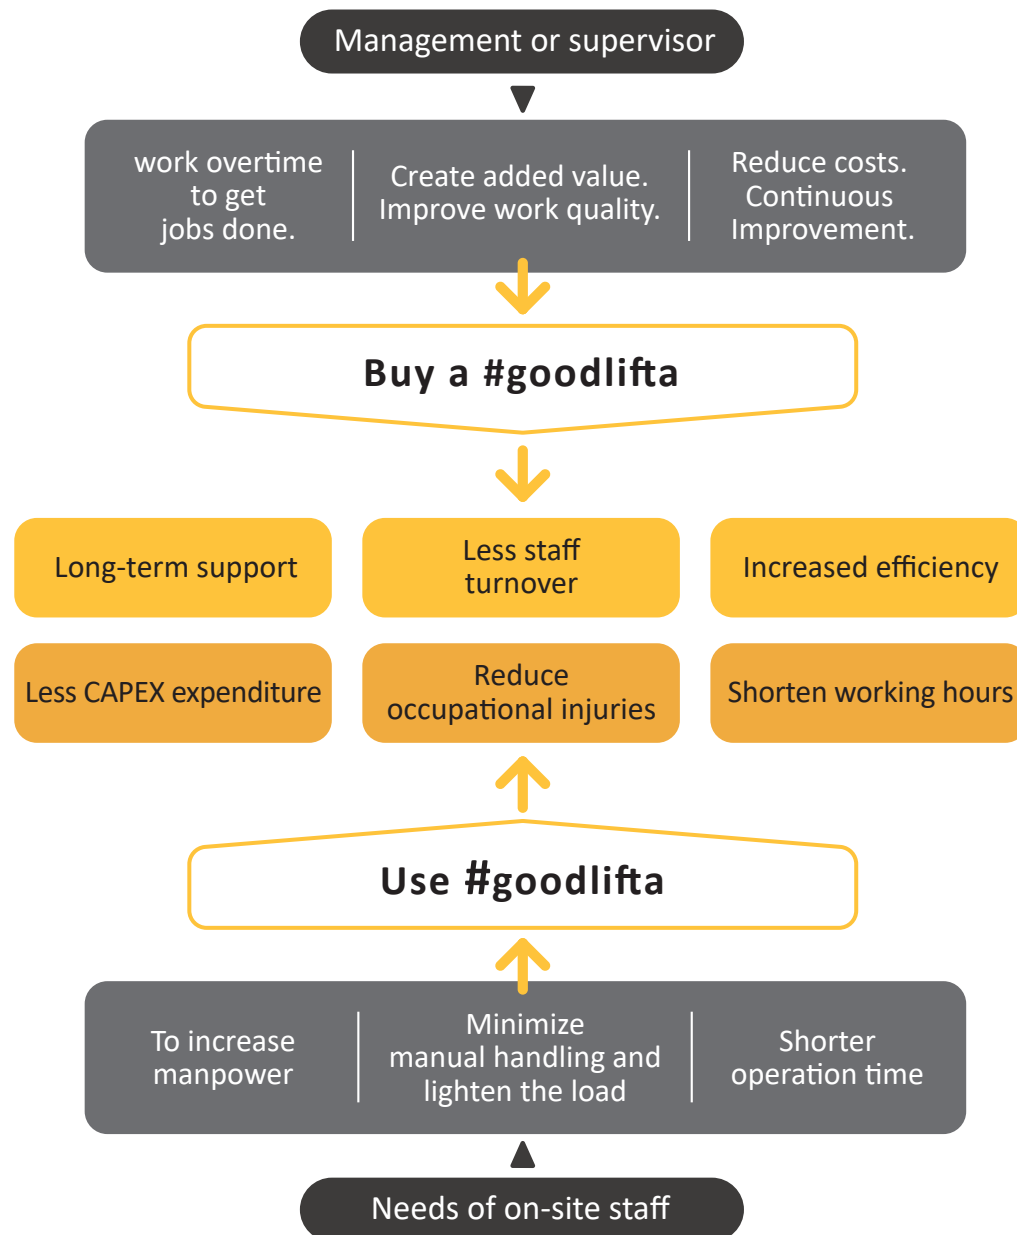

Features

No setbacks, no complaints

- ✦ Oil-free
- ✦ Maintenance-free
- ✦ License-free
- ✦ Ultra-quiet
- ✦ Fast, light and space-saving
- ✦ Safe and labor-saving
- ✦ Customization:
Material \ load
Height \ Lifting tools
Legs \ Environment


Safety

Thoughtful engineering

Craftsmanship


- 1 Standard protection level of IP41
- 2 Optional IP66 for dust and water proof
- 3 Descending safety clutch
- 4 Overload protection
- 5 Battery overcharge protection
- 6 Battery level display
- 7 Charger charging display
- 8 Main power switch
- 9 Central locking castors
- 10 Built-in 100-240V charger
- 11 S series - all stainless steel (SUS304)
- 12 A series - Aluminum mast (lightweight)

S - Stainless Steel Series

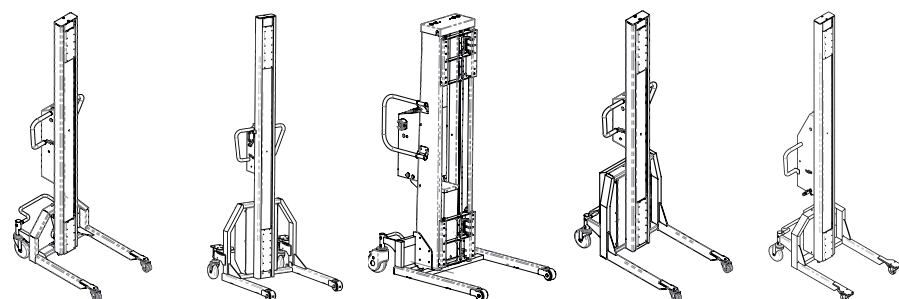


#	S1	S2	S3	S4	S14
Model	Ann	Wilson	Mandy	Flash	Elaine
Load capacity kg	80	200	300	120	50
Lifting height mm	1300 1600 1900 2200	1200 1500 1800 2100	1200 1500 1800 2100	1200 1500 1800 2100	1300 1600 1900 2200
Mast height mm	1600 1900 2200 2500	1600 1900 2200 2500	1600 1900 2200 2500	1600 1900 2200 2500	1600 1900 2200 2500
IP protection	IP41 or IP66	IP41 or IP66	IP41 or IP66	IP41 or IP66	IP41 or IP66
Lifting speed	125mm/s	125mm/s	125mm/s	250mm/s	200mm/s
Page	P.9	P.11	P.13	P.15	P.17

Self-propelled series

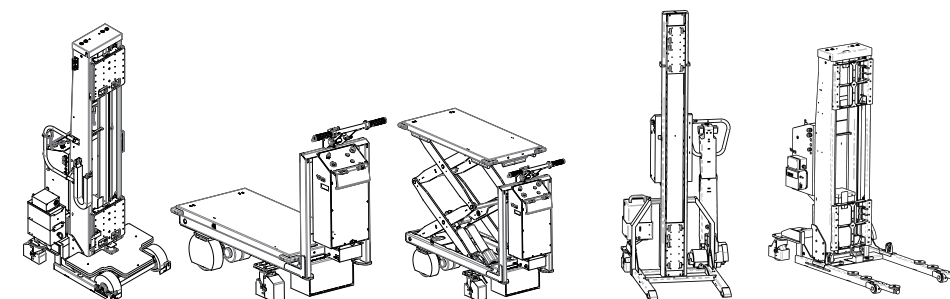

#	S8	S9	SX	S13	S14
Model	MandyGo	JustinGo	JustinGo Lift	Wilson X Drive	Mandy Drive
Load capacity kg	300	500	300	200	300
Lifting height mm	1500 1800 2100	NA	450-1100	1500 1800 2100	1500 1800 2100
Mast height mm	1900 2200 2500	(handle) 1000	(handle) 1000	1900 2200 2500	1900 2200 2500
IP protection	IP41	IP41	IP41	IP41	IP41
Lifting speed	125mm/s	NA	62.5mm/s	125mm/s	125mm/s
Page	P.19	P.21	P.21	P.23	P.25

A - aluminum mast series

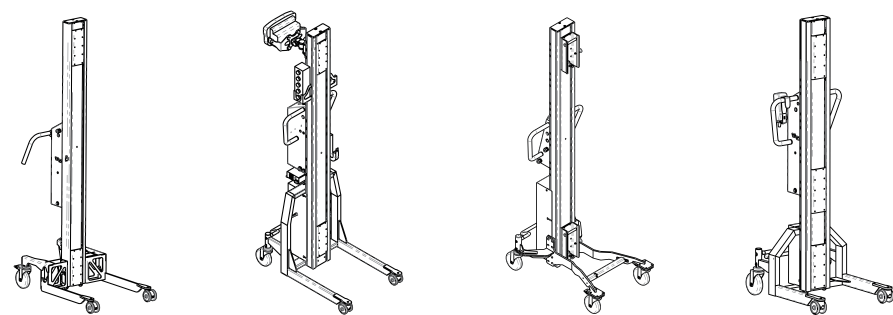

#	A1	A4	A14	A15
Model	Zac	Flash (Lite)	Grace	Jog
Load capacity kg	80	120	50	70
Lifting height mm	1300 1600 1800	1300 1600 1800	1300 1600 1800	1300 1600 1800
Mast height mm	1600 1900 2200	1600 1900 2200	1600 1900 2200	1600 1900 2200
IP protection	IP41	IP41	IP41	IP41
Lifting speed	125mm/s	250mm/s	200mm/s	125mm/s
Page	P.27	P.29	P.31	P.33

All models Load capacity vs. lifting speed

Stainless steel series		
Model	Load capacity	Lifting speed (mm/Second)
Elaine	50kg / 110lbs	200
Ann AntX	80kg / 176lbs	125
Flash FlashX FlashXdrive	120kg / 260lbs	250
Wilson WilsonX WilsonXdrive	200kg / 440lbs	125
Mandy MandyGo MandyDrive	300kg / 660lbs	125
Mandy ⁺ Mandy ⁺ Go Mandy ⁺ Drive	180kg / 400lbs	250
Martin MartinDrive	400kg / 880lbs	125

Lightweight aluminum series		
Model	Load capacity	Lifting speed (mm/Second)
Grace	50kg / 110lbs	200
Jog	70kg / 150lbs	125
Zac	80kg / 176lbs	125
Flash ^(Lite)	120kg / 260lbs	250

Stainless Steel Series Ann

Load capacity : 80kg


Model	Ann160A	Ann190A	Ann220A
R Lifting height mm	1300	1600	1900
H Mast height mm	1600	1900	2200
Lifting speed	125mm/sec, soft start/stop		
IP Protection	IP41		
Battery	24V10AH Lead Acid		
Charging voltage	100-240VAC, 50/60HZ		
Charging time	4hours		
Smart system	ASP (Advanced Sensor Positioning) 3 work stations x 5 levels		

Optional	Description
☐ IP Protection	IP66 (dust and water proof)
☐ Lithium battery	24V20AH (Charging time 2.5 hours)
☐ RMC	Remote controller, wired

Front wheels	Front leg height
Ø75mm swivel	92mm
Ø80mm fixed	85mm





AntX190A-CAT
#113030401A

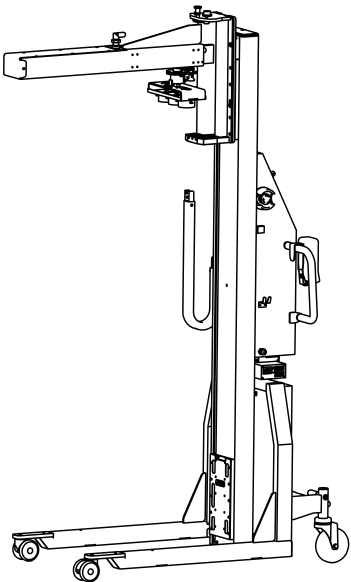

Dimensions

Can be customized
Optional ➤

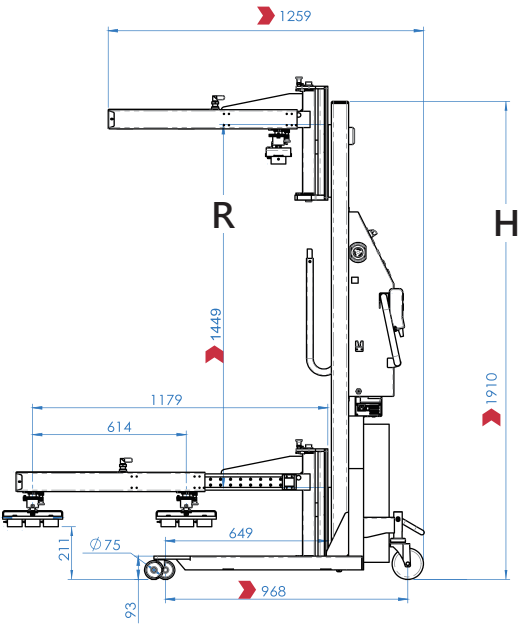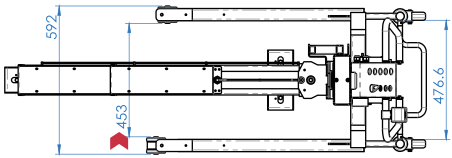

Stainless Steel Series Wilson

Load capacity : 200kg

Model	Wilson160A	Wilson190A	Wilson220A
R Lifting height mm	1200	1500	1800
H Mast height mm	1600	1900	2200
Lifting speed	125mm/sec, soft start/stop		
IP Protection	IP41		
Battery	24V20AH Lead Acid		
Charging voltage	100-240VAC, 50/60HZ		
Charging time	6-8hours		
Smart system	ASP (Advanced Sensor Positioning) 3 work stations x 5 levels		

Optional	Description
☐ IP Protection	IP66 (dust and water proof)
☐ Lithium battery	24V20AH (Charging time 2.5 hours)
☐ RMC	Remote controller, wired


Front wheels	Front leg height
Ø75mm swivel	110mm
Ø80mm fixed	85mm



Wilson220S-VAT-IP66
#113072601A




Scan to view
Tipping

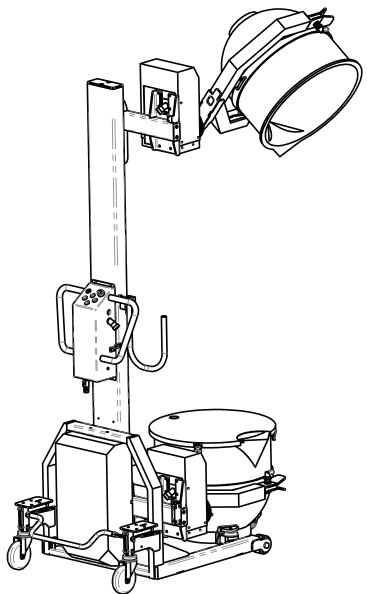

Dimensions

Can be customized
Optional ➤

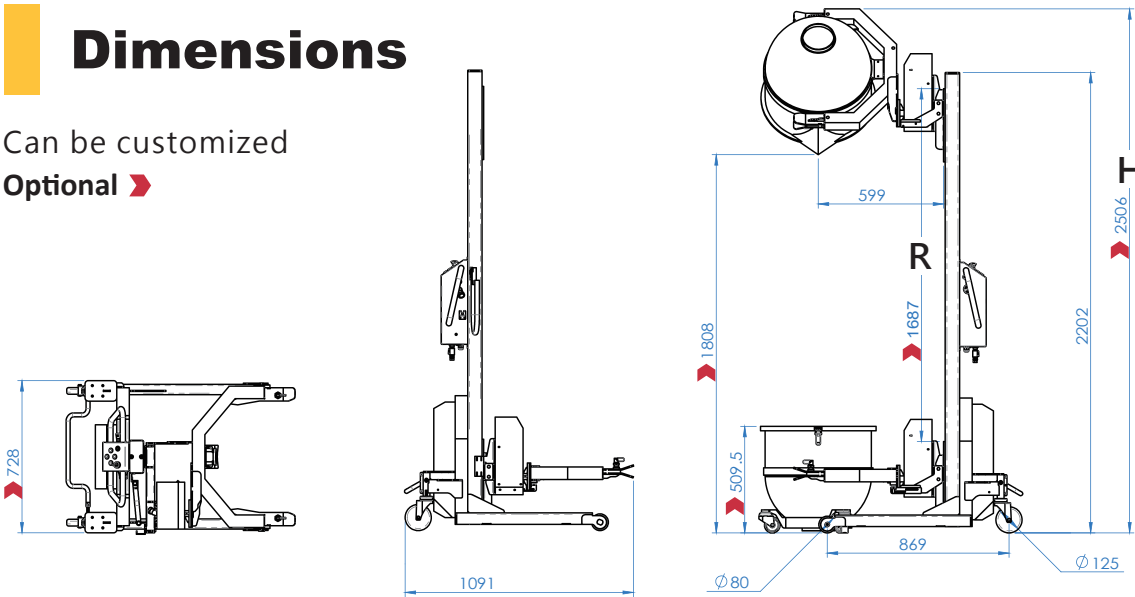

Stainless Steel Series Mandy

Load capacity : 300kg

Model	Mandy160S	Mandy190S	Mandy220S
R Lifting height mm	1200	1500	1800
H Mast height mm	1600	1900	2200
Lifting speed	125mm/sec, soft start/stop		
IP Protection	IP41		
Battery	24V22AH Lead Acid		
Charging voltage	100-240VAC, 50/60HZ		
Charging time	6-7hours		

Optional	Description
☐ IP Protection	IP66 (dust and water proof)
☐ ASP	ASP (Advanced Sensor Positioning) 3 work stations x 5 levels

Front wheels	Front leg height
Ø80mm fixed	85mm




Mandy220S-F15

#112030201A





Scan to view
Fork

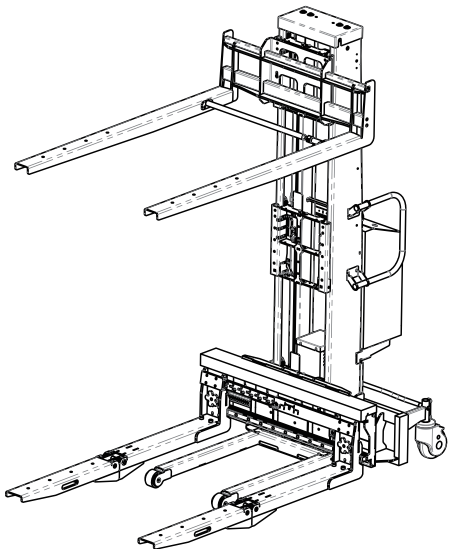

Dimensions

Can be customized
Optional ➤

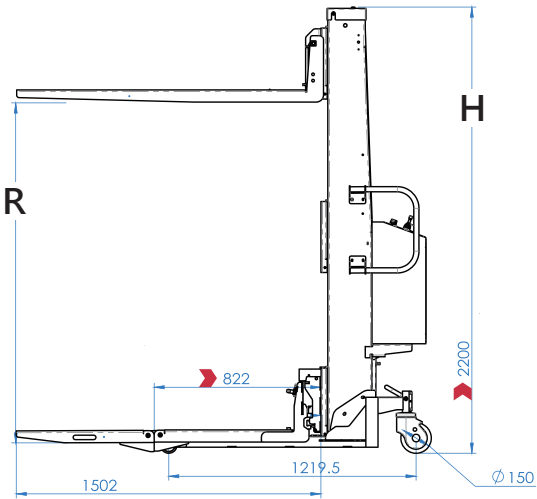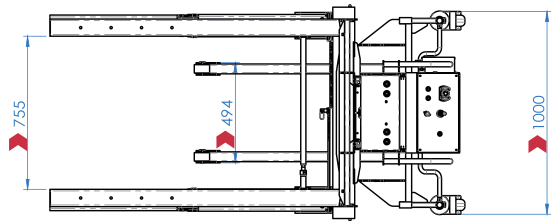

Stainless Steel Series Flash

Load capacity : 120kg(High-Speed Motor)

Model	Flash160A	Flash190A	Flash220A
R Lifting height mm	1200	1500	1800
H Mast height mm	1600	1900	2200
Lifting speed	250mm/sec, soft start/stop		
IP Protection	IP41		
Battery	24V20AH Lead Acid		
Charging voltage	100-240VAC, 50/60HZ		
Charging time	6-7hours		

Optional	Description
☐ IP Protection	IP66 (dust and water proof)
☐ Lithium battery	24V20AH (Charging time 2.5 hours)
☐ RMC	Remote controller, wired


Front wheels	Front leg height
Ø75mm swivel	110mm
Ø80mm fixed	85mm



Flash190A-FTG-IP66
#113092001A





Scan to view
Tipping

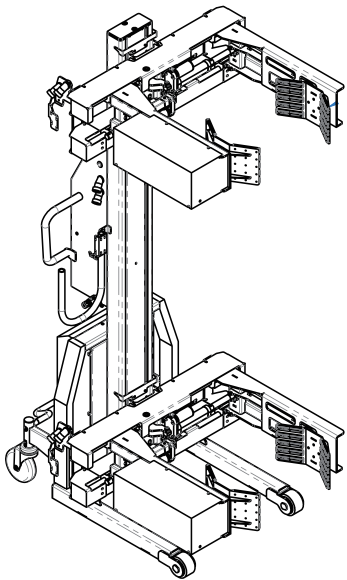

Dimensions

Can be customized
Optional ➤

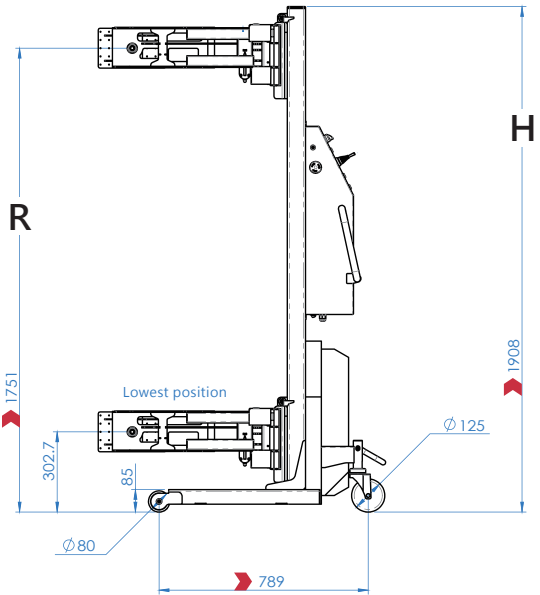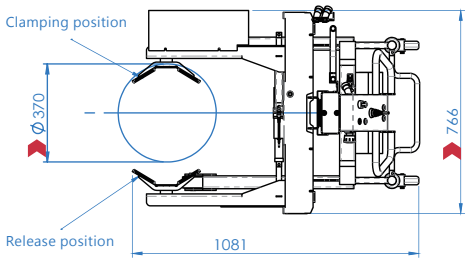

Lightweight
Stainless Steel Series

Elaine

Load capacity : 50kg

Model	Elaine190A	Elaine220A
R Lifting height mm	200 - 1680mm	200 - 1980mm
H Mast height mm	1900mm	2200mm
Lifting speed	200mm/sec, soft start/stop	
IP Protection	IP41	
Battery	24V7AH Lead Acid	
Charging voltage	100-240VAC, 50/60HZ	
Charging time	4hours	
Smart system	ASP (Advanced Sensor Positioning) 3 work stations x 5 levels	

Optional	Description
☐ IP Protection	IP66 (dust and water proof)
☐ Lithium battery	24V20AH (Charging time 2.5 hours)
☐ RMC	Remote controller, wired

Front wheels	Front leg height
Ø75mm swivel	110mm
Ø80mm fixed	85mm



Elaine220A-RPS-IP66
#114021601A




Scan to view
Platform

Platform dimensions
(mm)

- ☐ 500x500
- ☐ 640x640
- ☐ 940x640
- ☐ Other ____x____

Dimensions


Can be customized
Optional ➤

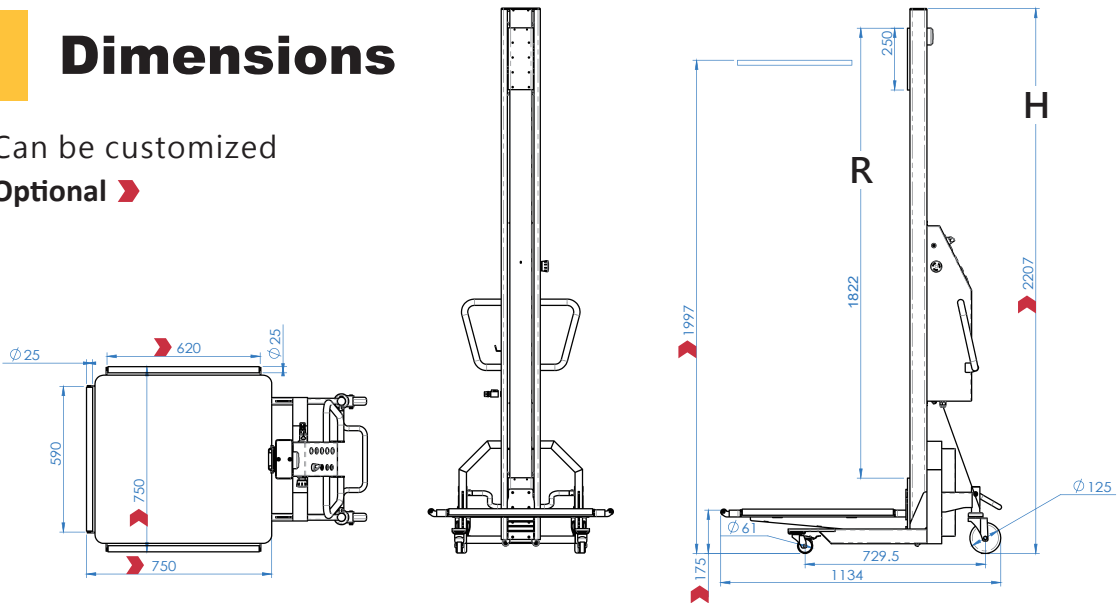

Self-propelled Series MandyGo

Load capacity : 250-300kg


Model	MandyGo190A	MandyGo220A	MandyGo250A
R Lifting height mm	1500	1800	2100
H Mast height mm	1900	2200	2500
Load capacity	300kg	300kg	250kg
Lifting speed	125mm/sec, soft start/stop		
IP Protection	IP41		
Battery	☐ Standard: 24V40AH lithium battery ☐ Optional: QXP Quick exchange DC24V20AH lithium battery pack		
Charging voltage	100-240VAC, 50/60HZ		
Charging time	2.5hours		
Material	304 Stainless Steel		
Self - propelling speed	Low speed 0.2-1.5km/h, soft start/stop High speed 2-4.5km/h, soft start/stop		
Safety design	• FCW Front Collision Warning • ERB Emergency Reverse & Buzzer • STA Safe Turn Assisit • Anti-pinch caster guard • MP3 warning music • (Optional) warning LED		
Smart system	ASP (Advanced Sensor Positioning) 3 work stations x 5 levels		

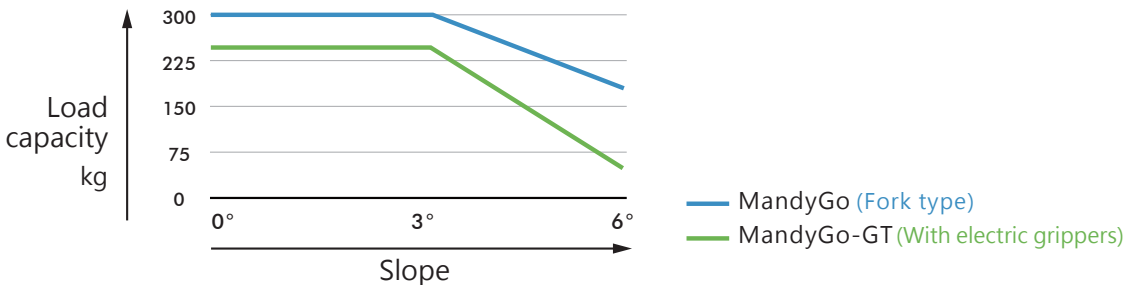

MandyGo170A-FRK
#111070501A





Scan to view
Fork handling

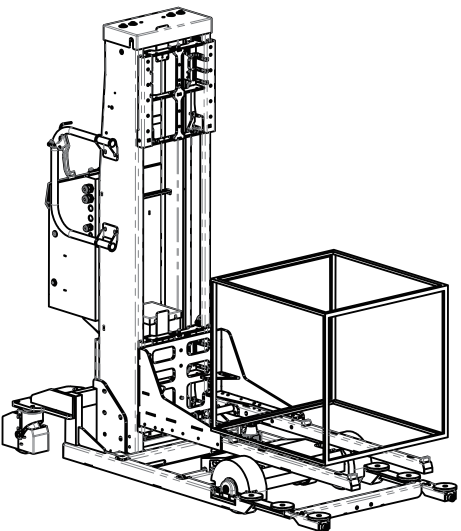

Dimensions


Can be customized
Optional ➤

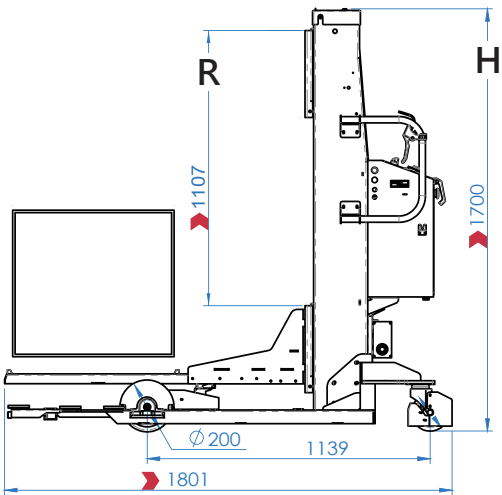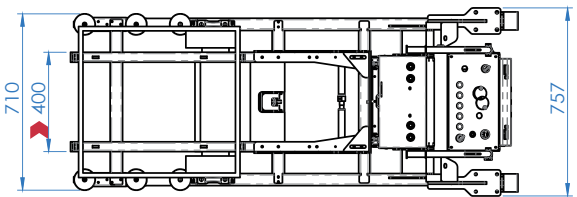


Self-propelled Series JustinGo

Load capacity : 300-500kg

Model	JustinGo	JustinGoLift
Machine Dimensions (L x W x H)	1400 x 500 x 1000mm	
R Lifting height mm	The platform has no lifting and decreasing function	450-1100mm
Drive speed - empty	0-3km/h	0-3km/h
Drive speed - loaded	0-3km/h	0-3km/h
Load capacity	500kg	300kg
IP Protection	IP41	
Battery	DC24V40AH Lithium Battery	
Charging voltage	100-240VAC, 50/60HZ	
Charging time	2.5hours	
Material	304 Stainless Steel Oil-free design, maintenance-free	
Control panel	• Power switch • Forward/reverse • Up/down • Speed adjustment • EMS emergency stop	
Safety design	• FCW Front Collision Warning • ERB Emergency Reverse & Buzzer • STA Safe Turn Assisit • Anti-pinch caster guard • MP3 warning music • (Optional) warning LED	

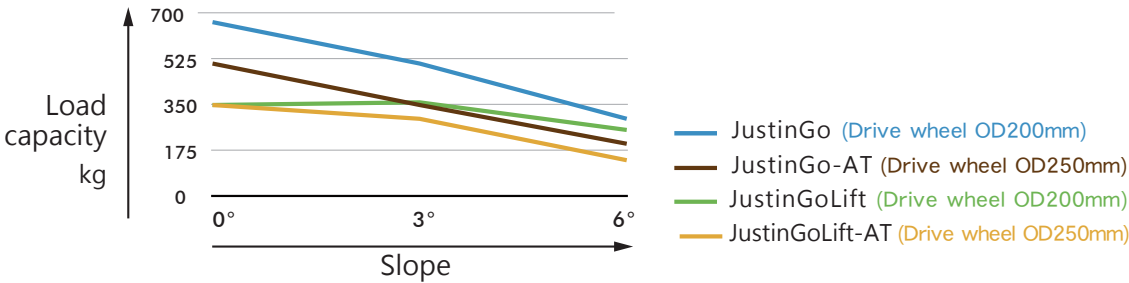


JustinGoLift
#111022201A

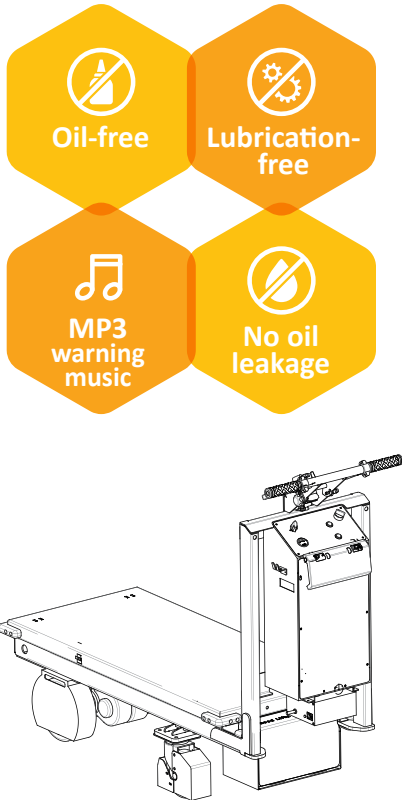

Dimensions


Can be customized
Optional ➤

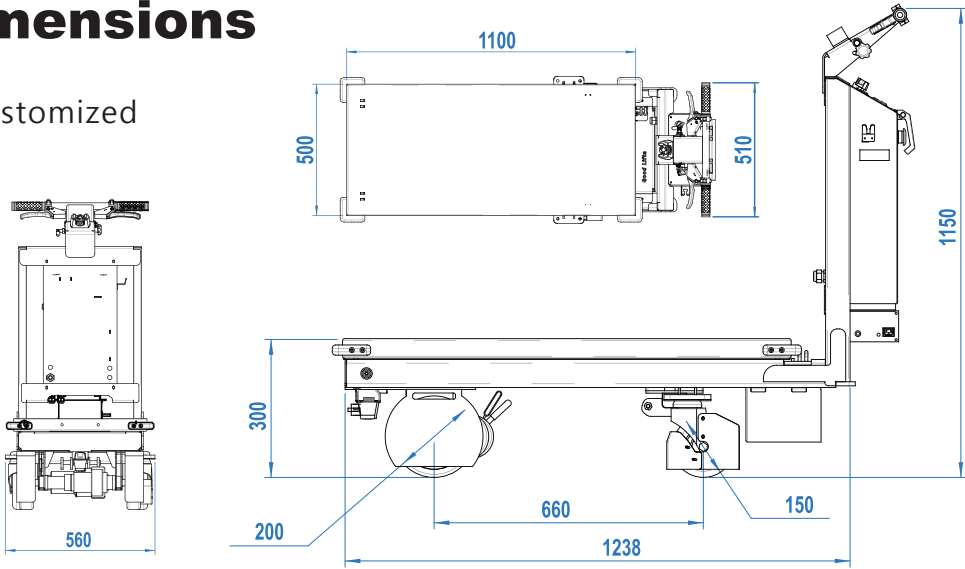

Self-propelled WilsonXdrive

Load capacity : 200kg

Model	WilsonX190D	WilsonX220D
R Lifting height mm	200-1500	200-1800
H Mast height mm	1900 (Reinforced)	2200 (Reinforced)
Lifting speed	125mm/sec, soft start/stop	
IP Protection	IP41	
Battery	QXP Quick exchange DC24V20AH lithium battery pack	
Charging voltage	100-220VAC, 50/60HZ	
Charging time	2.5hours	
Material	304 Stainless Steel + aluminum	
Drive speed	Low speed 0-3km/h, soft start/stop High speed 0-1.5km/h, soft start/stop	
Clean Technology	• Meets cleanroom requirements • ESD protection	
Safety design	• FCW Front Collision Warning • ERB Emergency Reverse & Buzzer • STA Safe Turn Assisit • Anti-pinch caster guard • MP3 warning music • (Optional) warning LED	

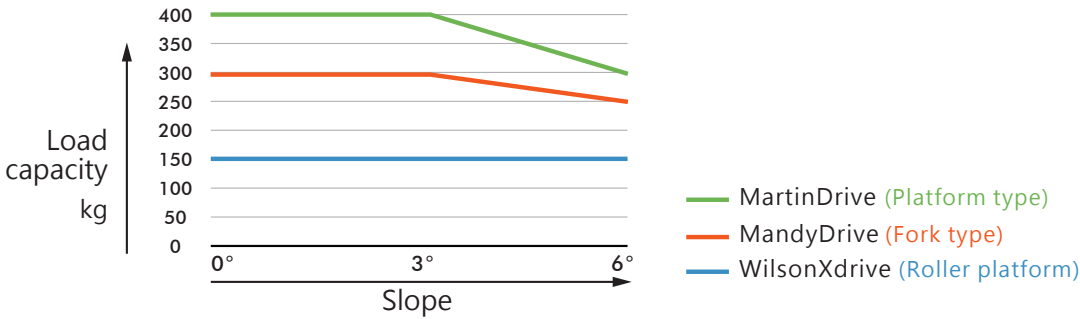


WilsonX220D-RCS

#113122401A





Scan to view
Platform

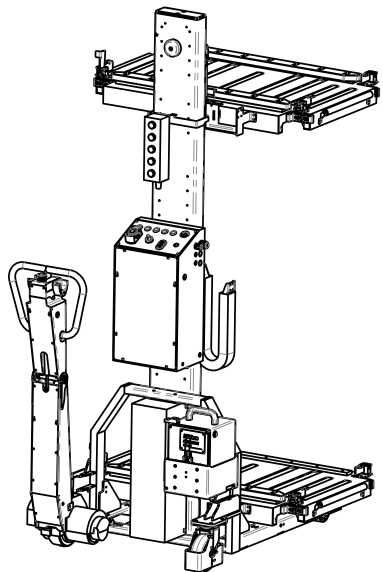

Dimensions


Can be customized
Optional ➤

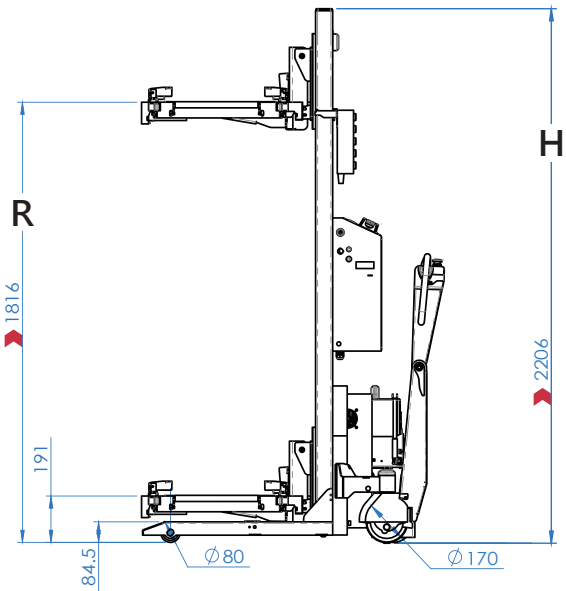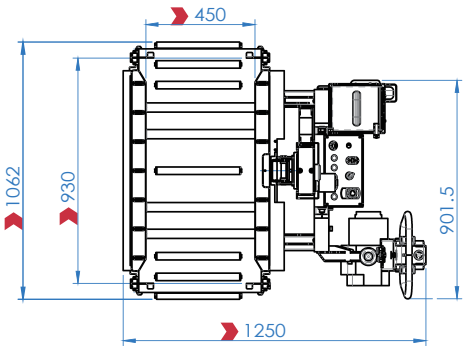


Self-propelled MandyDrive

Load capacity : 300kg

Model	Mandy190D	Mandy220D
R Lifting height mm	200-1500	200-1800
H Mast height mm	1900	2200
Lifting speed	125mm/sec, soft start/stop	
IP Protection	IP41	
Battery	QXP Quick exchange DC24V20AH lithium battery pack	
Charging voltage	100-220VAC, 50/60HZ	
Charging time	2.5hours	
Material	304 Stainless Steel + aluminum	
Drive speed	Low speed 0-3km/h, soft start/stop High speed 0-1.5km/h, soft start/stop	
Clean Technology	• Meets cleanroom requirements • ESD protection	
Safety design	• FCW Front Collision Warning • ERB Emergency Reverse & Buzzer • STA Safe Turn Assisit • Anti-pinch caster guard • MP3 warning music • (Optional) warning LED	


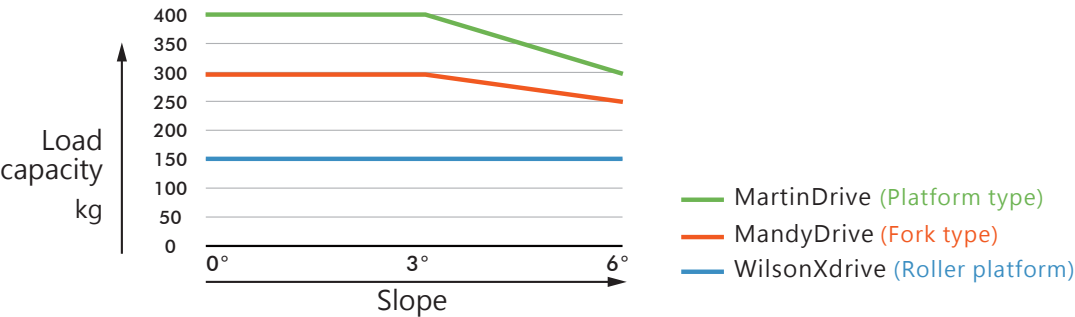


Martin170D-FWS
#113102901A

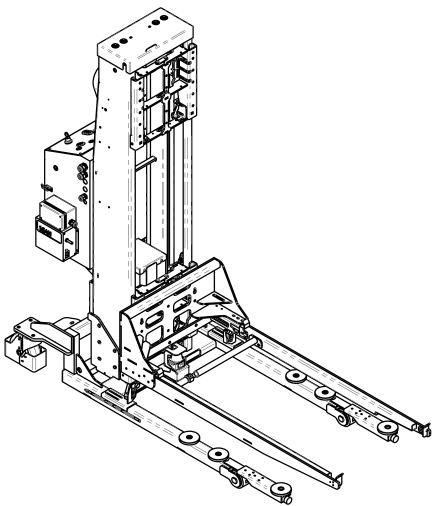

Dimensions

Can be customized
Optional ➤

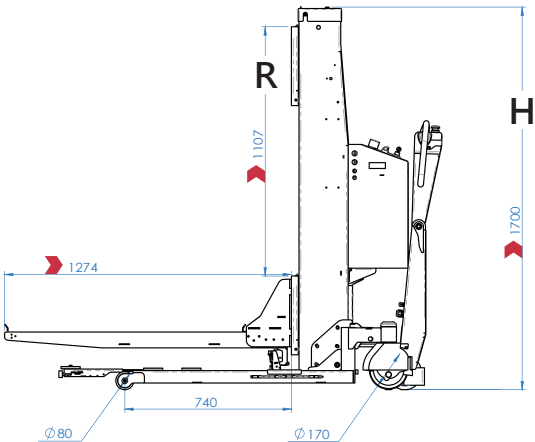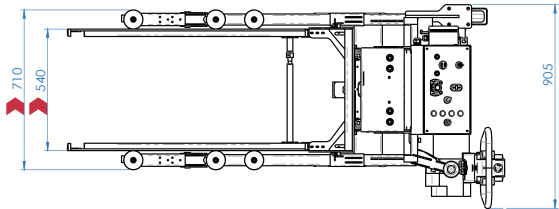

Aluminium Mast Zac

Load capacity : 80kg

Model	Zac160A	Zac190A	Zac220A
R Lifting height mm	1300	1600	1800
H Mast height mm	1600	1900	2200
Lifting speed	125mm/sec, soft start/stop		
IP Protection	IP41		
Battery	24V10AH Lead Acid		
Charging voltage	100-240VAC, 50/60HZ		
Charging time	4hours		

Optional	Description
☐ IP Protection	IP66 (dust and water proof)
☐ Lithium battery	24V20AH (Charging time 2.5 hours)
☐ RMC	Remote controller, wired

Front wheels	Front leg height
Ø75mm swivel	92mm
Ø80mm fixed	85mm




Zac190A-MVB

#113041601A




Scan to view
VB

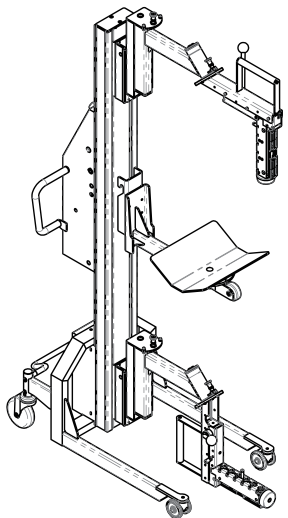

Dimensions

Can be customized
Optional ➤

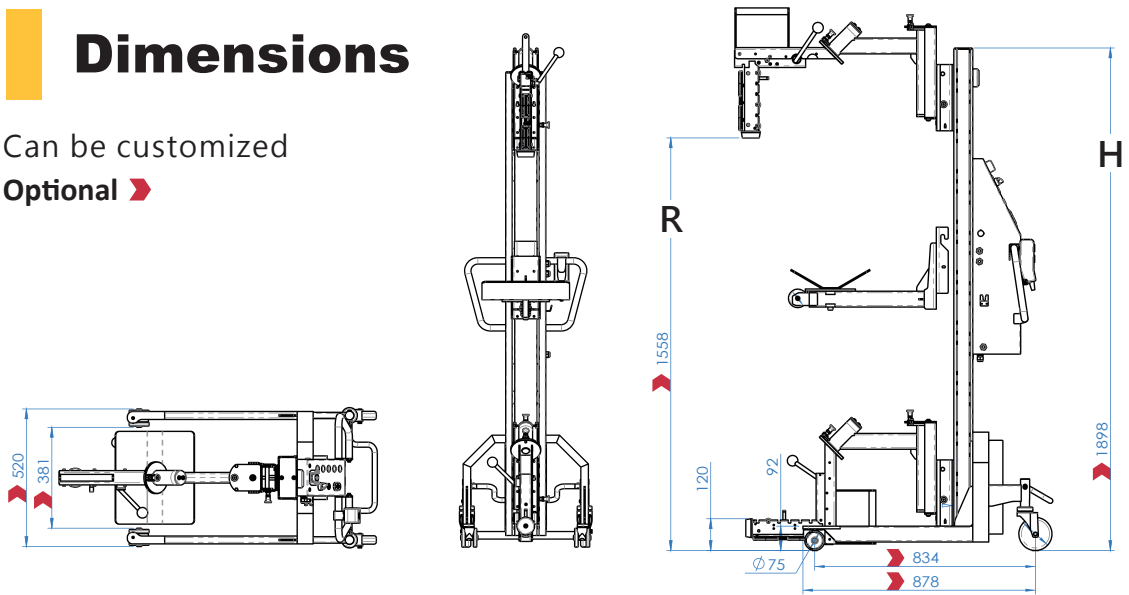

Aluminium Mast Flash^(lite)

Load capacity : 120kg(High-Speed Motor)

Model	Flash ^(lite) 190A	Flash ^(lite) 220A
R Lifting height mm	1500	1800
H Mast height mm	1900	2200
Lifting speed	250mm/sec, soft start/stop	
IP Protection	IP41	
Battery	24V10AH Lead Acid	
Charging voltage	100-240VAC, 50/60HZ	
Charging time	4hours	
Smart system	ASP (Advanced Sensor Positioning) 3 work stations x 5 levels	

Optional	Description
☐ Lithium battery	24V20AH (Charging time 2.5 hours)
☐ RMC	Remote controller, wired

Front wheels	Front leg height
Ø75mm swivel	92mm
Ø80mm fixed	85mm



Flash^(lite) 190A-LCP
#111031504A




Scan to view
Platform

Platform dimensions
(mm)

- ☐ 500x500
- ☐ 640x640
- ☐ 940x640
- ☐ Other ____x____

Dimensions

Can be customized
Optional ➤

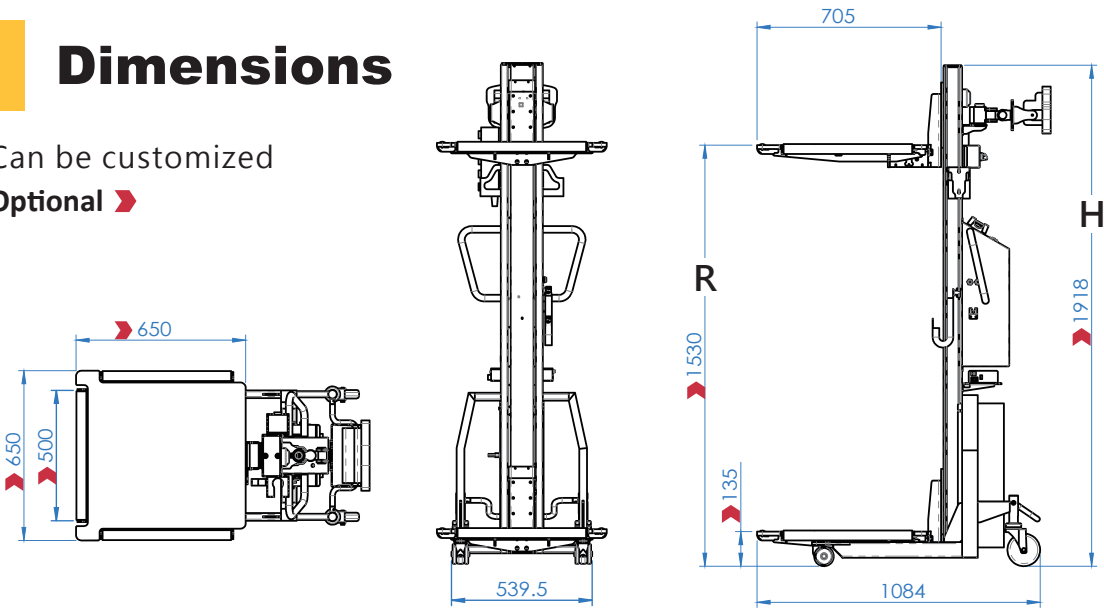

Aluminium Mast Grace

Load capacity: 50kg(High-Speed Motor)


Model	Grace160A	Grace190A	Grace220A
R Lifting height mm	200 - 1380mm	200 - 1680mm	200 - 1980mm
H Mast height mm	1600	1900	2200
Lifting speed	200mm/sec, soft start/stop		
IP Protection	IP41		
Battery	24V7AH Lead Acid		
Charging voltage	100-240VAC, 50/60HZ		
Charging time	2.5hours		
Smart system	ASP (Advanced Sensor Positioning) 3 work stations x 5 levels		

Grace190A

#113090201A



Scan to view
Grace

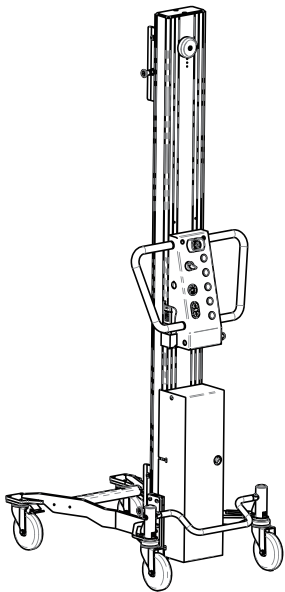




Common lifting fixtures

► For more options, please contact us



Dimensions

Can be customized
Optional ►

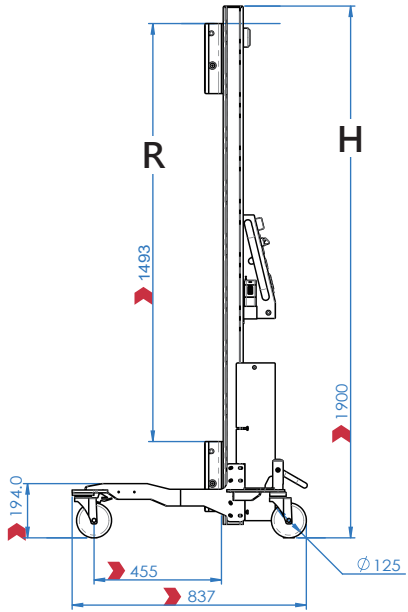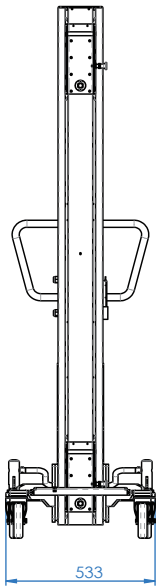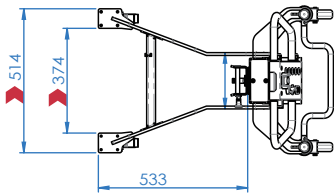


Aluminium Mast JOG

Load capacity : 70kg

Model	Jog160A	Jog190A	Jog220 A
R Lifting height mm	200 - 1380mm	200 - 1680mm	200 - 1980mm
H Mast height mm	1600	1900	2200
Lifting speed	125mm/sec, soft start/stop		
IP Protection	IP41		
Battery	24V7AH Lead Acid		
Charging voltage	100-240VAC, 50/60HZ		
Charging time	4hours		



Jog160-FBS
#114022701A/113121901A

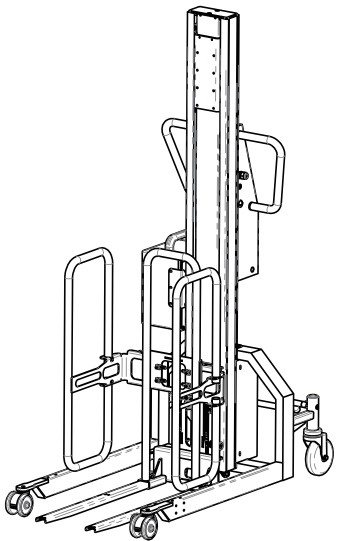



Common lifting fixtures

➤ For more options, please contact us



Dimensions

Can be customized
Optional ➤

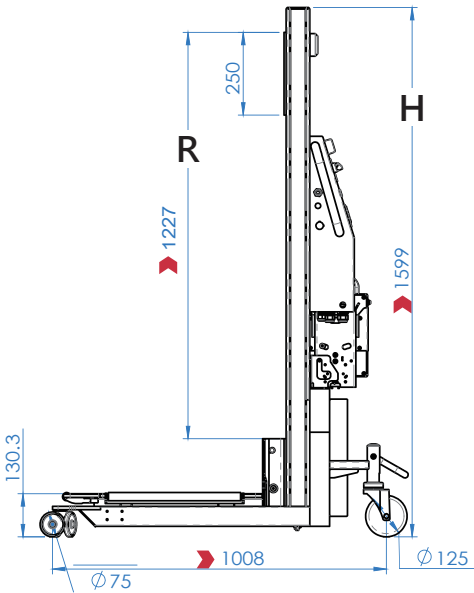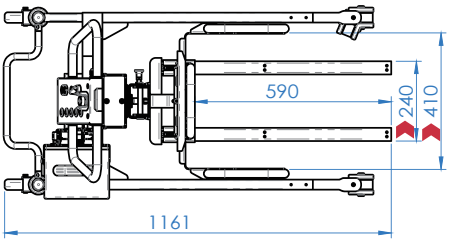

Popular manual lifting tools Scan to view



▲ Crane arm, swivel



▲ C fork



▲ Front tipping platform



▲ Customized fork



▲ Manual roll handler



▲ Manual roll handler




▲ Manual conveyor platform



▲ Roller platform with fences

► For more options, please contact us.

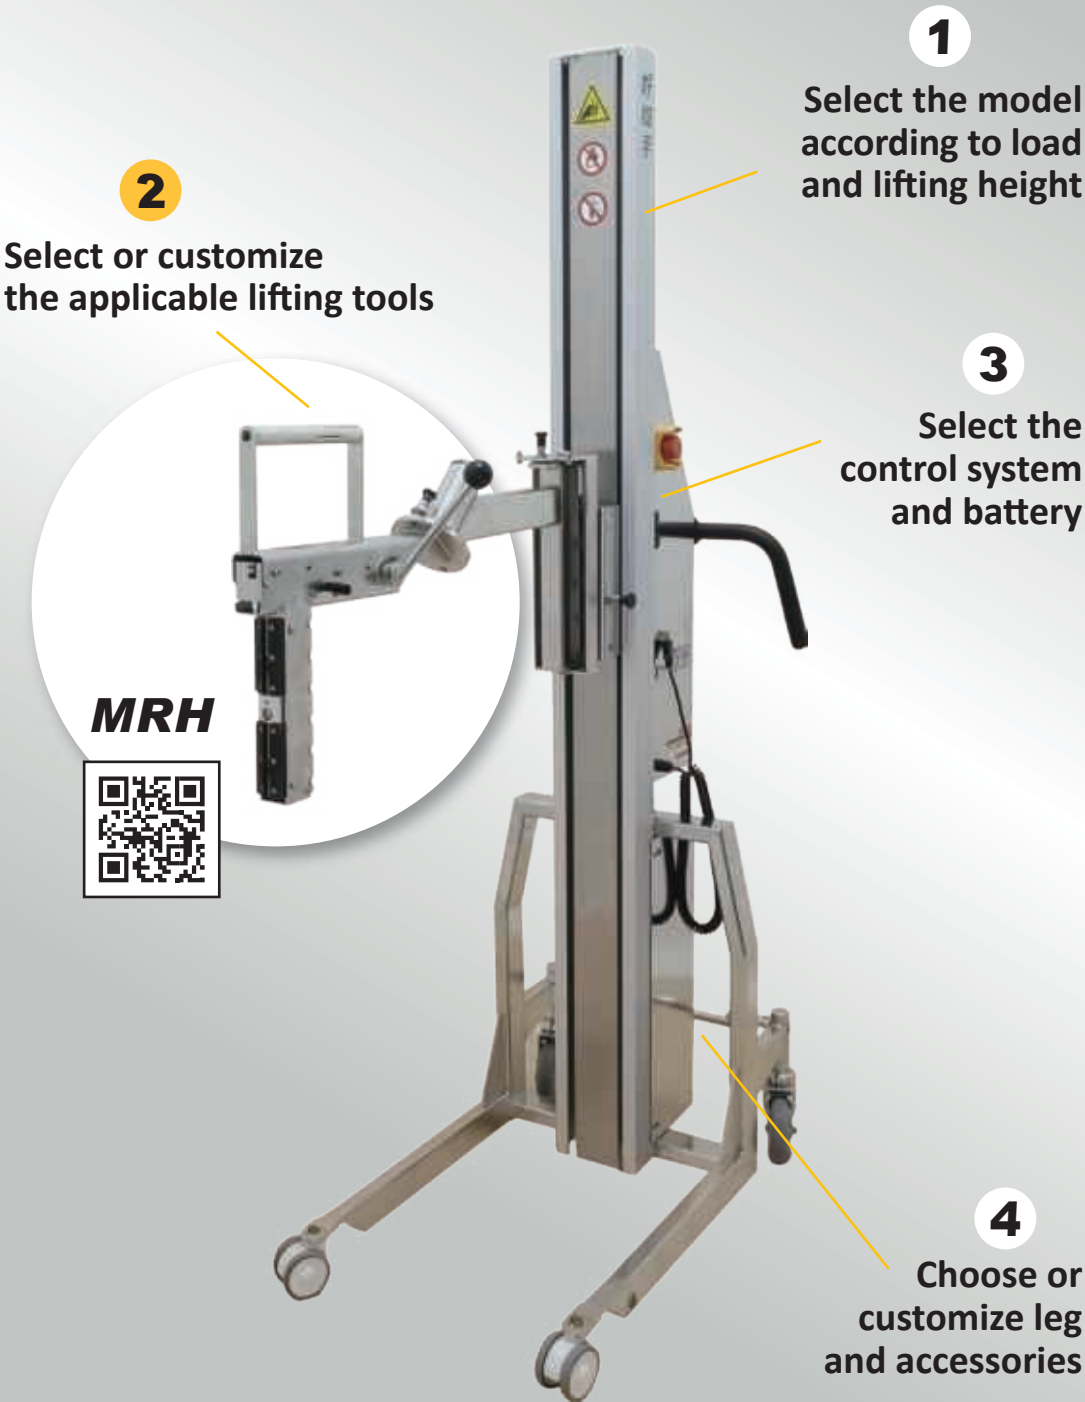

1 Select the model according to load and lifting height


2 Select or customize the applicable lifting tools

3 Select the control system and battery

4 Choose or customize leg and accessories

MRH

► For more options, please contact us.

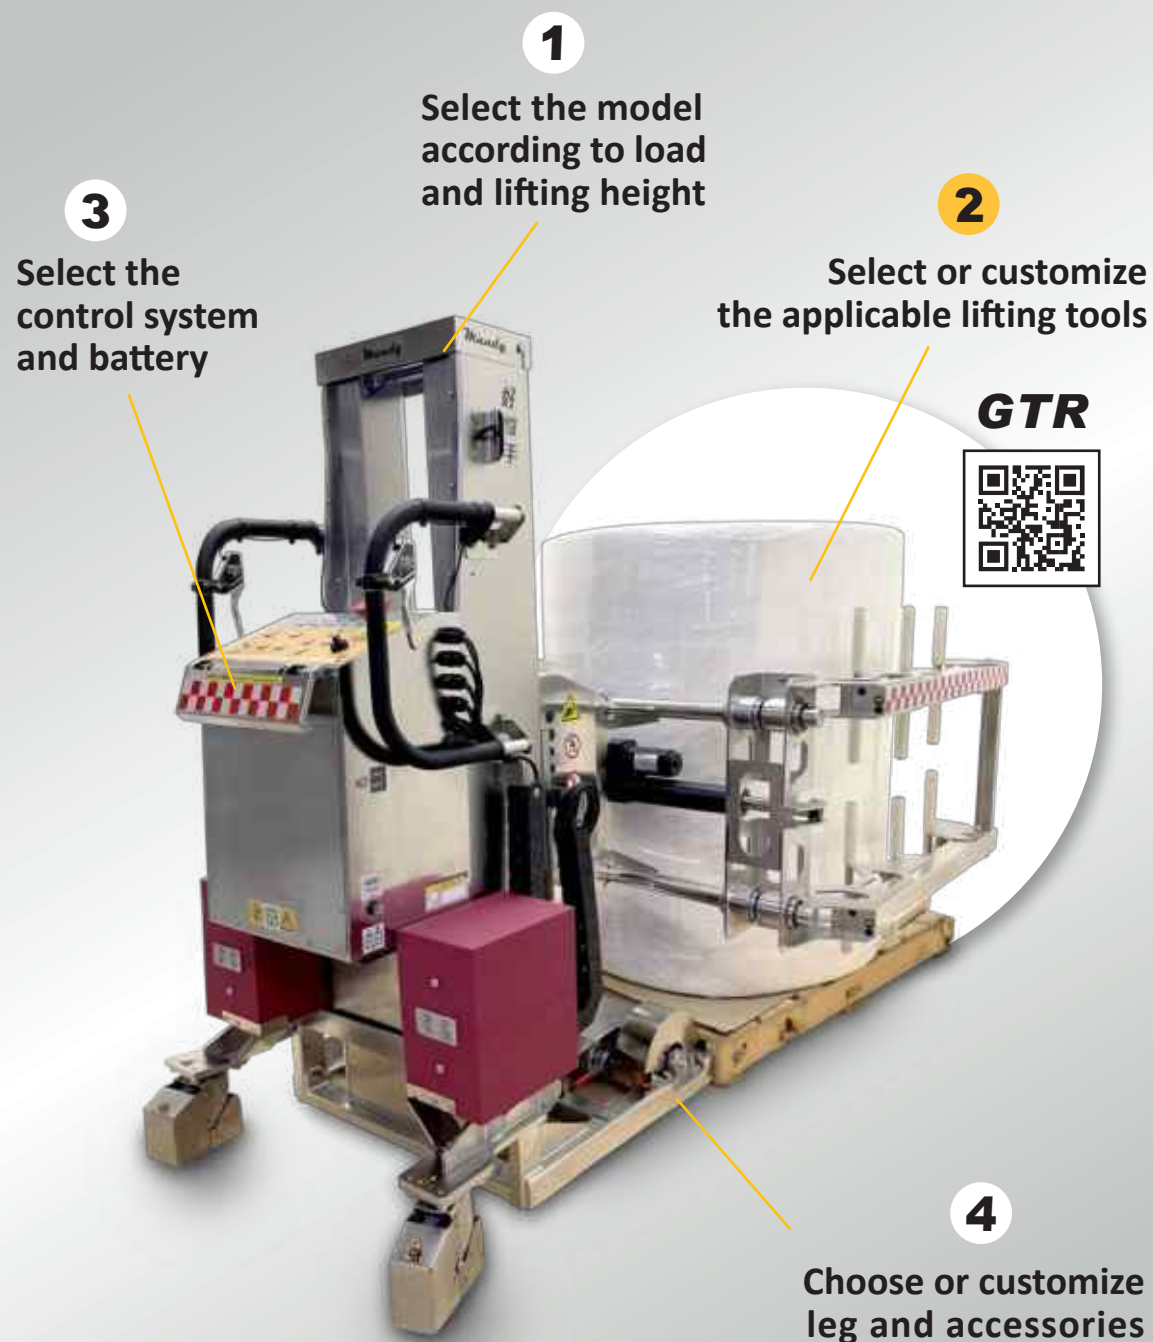


Popular electric lifting tools [Scan to view](#)



▲ Roller conveyor platform, lateral



▲ Vat lift-and-tip

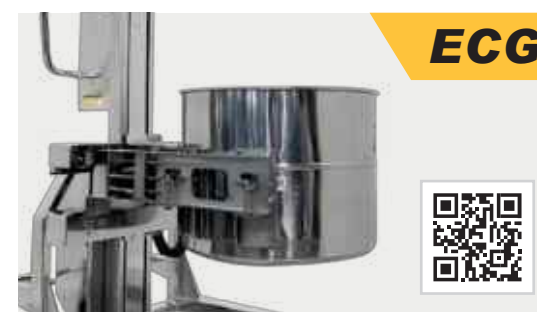

▲ Electric clamping gripper




▲ Roller conveyor platform, front



▲ Side tipping platform, left (STR, right tipping available)



▲ Clamp and front tipping platform

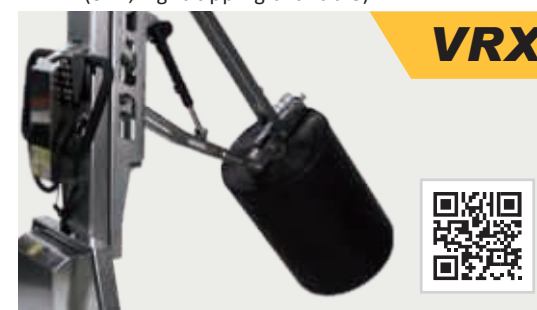

▲ Vertical/Horizontal roll handling



▲ Roll grip and rotate

Control systems



S
Streamlined control panel

User-friendly interface
intuitive icons
simple layout

A
ASP
Advanced Sensor Positioning

Smart memory function:
3 work stations
x
5 levels

Trilateral hanger type

Integrated type

Scan to view



H
HMI full color
human-machine interface

Touch panel
Easy to use
Built-in intelligent
diagnostic function

Standard - built-in battery

IP66

Standard - built-in battery

IP41

RMC Remote Controller

Optional: Lift and draw
QXP Quick exchange battery pack + charging station

Battery pack

+

charging station

Optional: Flip to draw
QXP Quick exchange battery pack + charging station

Battery pack

+

charging station

Lift with Ease,
Move with Confidence.



#108031801A



#113100101A



#113031101A



#113110601A

Showcase Cleanrooms

IP66



#110020308A



#113072601A



#112120101A



#111123001A

Food factory
Central kitchen
Pharmaceutical



#111110101A



#114022801A



#107090910A



#111081901A

Showcase Reel handings



#113111301A



#113082501A



#112022801A



#112042501A

好搬手
#goodlifta



UPLIFTED SOLUTIONS

optimized lifting & moving solutions



☎ +886-4-2392-7358
✉ support@goodlifta.com
🌐 goodlifta.com