

移動式吊臂-半電動

Semi-Electric Mobile Jib Crane

規格

Technical paramete

移動式吊臂-半電動


Semi-Electric Mobile Jib Crane

產品特點

- ⊙ 操作人員可選擇手動推行或電動驅動方式，操作簡便，提高效率與安全性。
- ⊙ 臂桿可手動360°旋轉，多角度作業，簡單實用、安全方便。
- ⊙ 電源插拔簡便，附有電源指示燈、紅色急停按鈕與專用充電插頭，簡單又安全。
- ⊙ 穩定耐用的遙控器；操作簡便，升降與伸縮按鈕靈活，速度可精確調整。

Product Features

- ⊙ The operator to choose between manual pushing or electric driving, improved efficiency, and safety.
- ⊙ Manual 360° arm rotation allows multi-directional lifting and handling, practical and easy to use.
- ⊙ Easy plug-in/out power switch, indicator lights, red emergency stop button, and professional charging port for safety.
- ⊙ Stable and durable controller; easy operation with flexible buttons for lifting, lowering, extending, and retracting, precise speed adjustment.

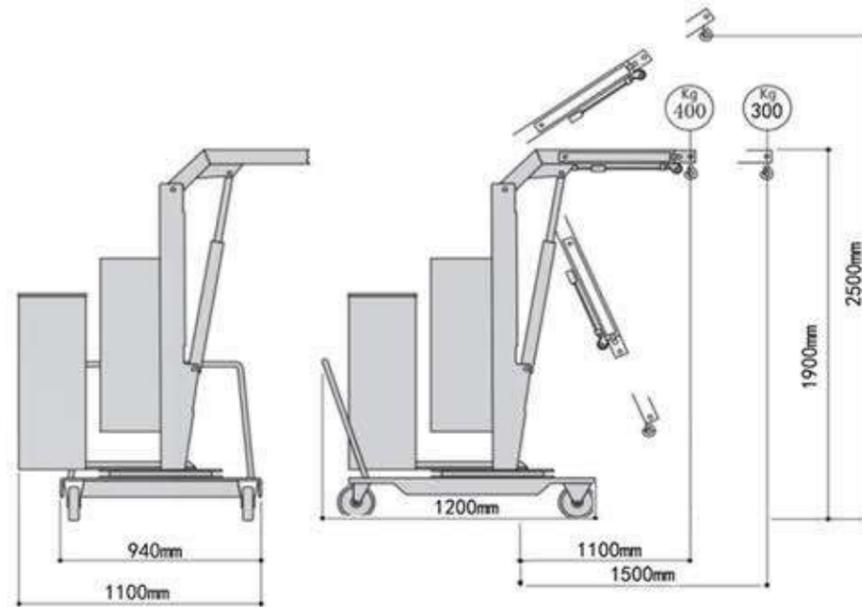

特性 / Feature		
型號 / Model		FS-400-BZD
吊臂升降、伸縮方式 / Arm lift & extend method		電動液壓 / Electric hydraulic
卷揚機 (吊鉤) 升降方式 / Hoist lift method		電動遙控 / Electric remote
吊臂移動方式 / Movement method		<input type="checkbox"/> 人力推動 / Manual moving <input type="checkbox"/> 電動走型 / Electric moving
吊臂是否360°旋轉 / Arm 360° rotation		是 / Yes
最大載重 / Max load	kg	400
吊臂伸最長載重 / Max load when extended	kg	300
臂長 / Arm length	mm	1150-1450
吊臂伸縮油缸行程 / Hydraulic cylinder stroke	mm	400
底盤前端到吊鉤水平方向距離/Distance from base to hook	mm	500-1150
吊臂收起尺寸 (長×寬×高) / Folded size (L×W×H)	mm	1760×940×1820
底盤尺寸 (長×寬) / Base size (L×W)	mm	1300×940
吊臂頂端最大離地高度 / Max arm height	mm	2820
吊鉤底部最大離地高度 / Max hook height	mm	2330
腳輪直徑 / Caster diameter	mm	200
油壓泵功率 / Pump power	kW	1.5
驅動電機 (電壓/功率) / Drive motor		/
電池 / Battery	V/Ah	12/120
充電器 / Charger	V/Ah	12/12
充電時間 / Charging time	h	8
充滿電後可連續使用時間 / Use time after full charge	h	~4.5
淨重 (不含配重) / Net weight	kg	330
控制方式 / Control method		控制8點無線遙控 / 8-button wireless remote